


## EI30-05 0.5VA Encapsulated Transformer

### FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


### OUTLINE DIMENSIONS

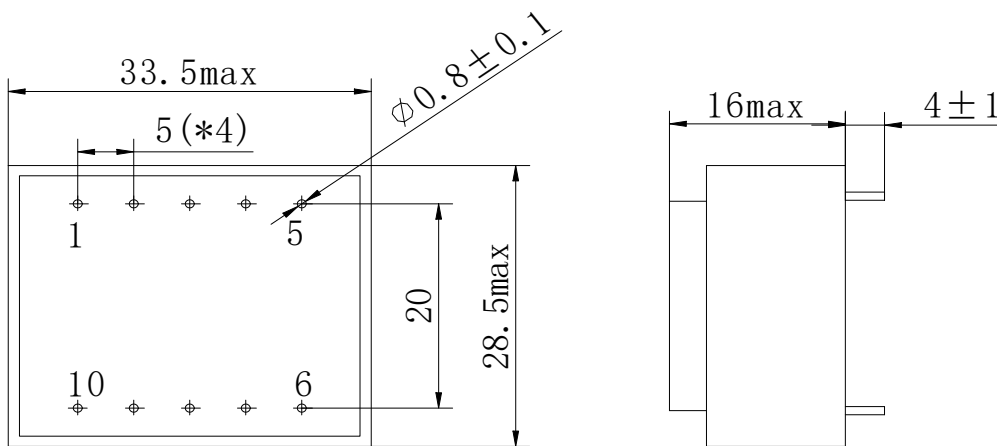

### COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

### SCHEMATIC DIAGRAM

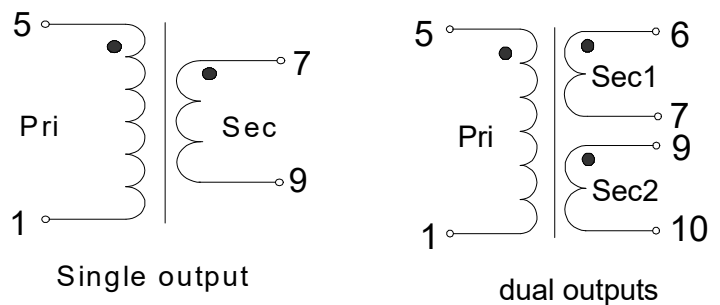

## ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP301-600	115V 50/60Hz	4.5V	111mA	T 70 B	41		•		•
XP301-601	115V 50/60Hz	6V	83mA	T 70 B	41		•		•
XP301-602	115V 50/60Hz	7.5V	67mA	T 70 B	41		•		•
XP301-603	115V 50/60Hz	9V	56mA	T 70 B	41		•		•
XP301-604	115V 50/60Hz	12V	42mA	T 70 B	41		•		•
XP301-605	115V 50/60Hz	15V	33mA	T 70 B	41		•		•
XP301-606	115V 50/60Hz	18V	28mA	T 70 B	41		•		•
XP301-607	115V 50/60Hz	24V	21mA	T 70 B	41		•		•
XP302-608	115V 50/60Hz	2x4.5V	2x56mA	T 70 B	41		•		•
XP302-609	115V 50/60Hz	2x6V	2x42mA	T 70 B	41		•		•
XP302-610	115V 50/60Hz	2x7.5V	2x33mA	T 70 B	41		•		•
XP302-611	115V 50/60Hz	2x9V	2x28mA	T 70 B	41		•		•
XP302-612	115V 50/60Hz	2x12V	2x21mA	T 70 B	41		•		•
XP302-613	115V 50/60Hz	2x15V	2x17mA	T 70 B	41		•		•
XP302-614	115V 50/60Hz	2x18V	2x14mA	T 70 B	41		•		•
XP302-615	115V 50/60Hz	2x24V	2x10mA	T 70 B	41		•		•
XP301-500	230V 50/60Hz	4.5V	111mA	T 70 B	41		•	•	•
XP301-501	230V 50/60Hz	6V	83mA	T 70 B	41		•	•	•
XP301-502	230V 50/60Hz	7.5V	67mA	T 70 B	41		•	•	•
XP301-503	230V 50/60Hz	9V	56mA	T 70 B	41		•	•	•
XP301-504	230V 50/60Hz	12V	42mA	T 70 B	41		•	•	•
XP301-505	230V 50/60Hz	15V	33mA	T 70 B	41		•	•	•
XP301-506	230V 50/60Hz	18V	28mA	T 70 B	41		•	•	•
XP301-507	230V 50/60Hz	24V	21mA	T 70 B	41		•	•	•
XP302-508	230V 50/60Hz	2x4.5V	2x56mA	T 70 B	41		•	•	•
XP302-509	230V 50/60Hz	2x6V	2x42mA	T 70 B	41		•	•	•
XP302-510	230V 50/60Hz	2x7.5V	2x33mA	T 70 B	41		•	•	•
XP302-511	230V 50/60Hz	2x9V	2x28mA	T 70 B	41		•	•	•
XP302-512	230V 50/60Hz	2x12V	2x21mA	T 70 B	41		•	•	•
XP302-513	230V 50/60Hz	2x15V	2x17mA	T 70 B	41		•	•	•
XP302-514	230V 50/60Hz	2x18V	2x14mA	T 70 B	41		•	•	•
XP302-515	230V 50/60Hz	2x24V	2x10mA	T 70 B	41		•	•	•