


EI30-12.5 1.8VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000, GB19212-1, GB19212-7
- 100% Production Tested

OUTLINE DIMENSIONS

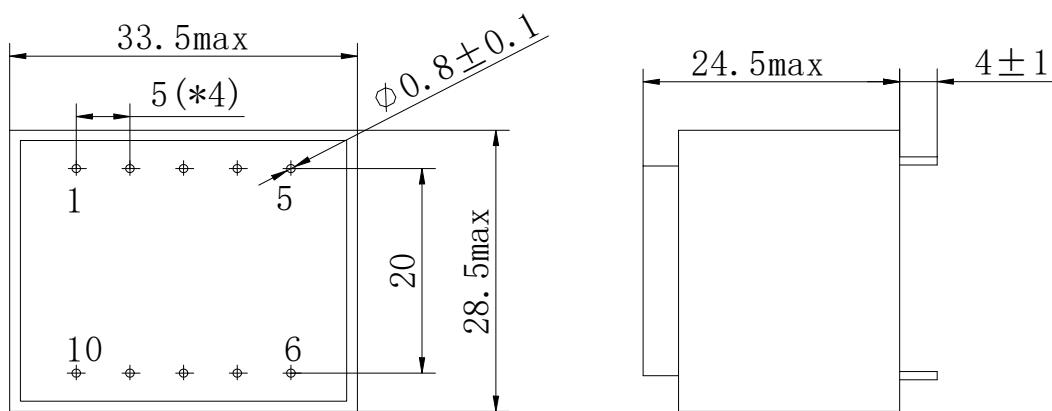


COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and

Telecommunications

SCHEMATIC DIAGRAM

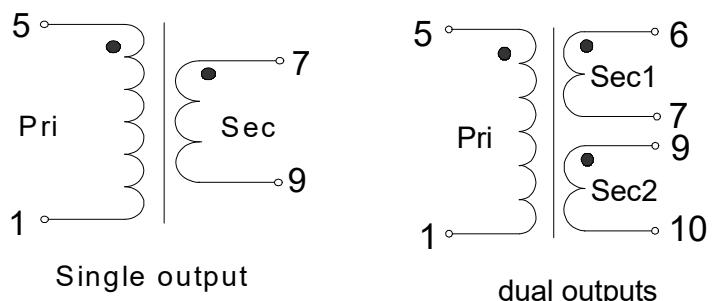

Single output

dual outputs

ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP301-696	115V 50/60Hz	4.5V	400mA	T40 B	83		•		•
XP301-697	115V 50/60Hz	6V	300mA	T40 B	83		•		•
XP301-698	115V 50/60Hz	7.5V	240mA	T40 B	83		•		•
XP301-699	115V 50/60Hz	9V	200mA	T40 B	83		•		•
XP301-800	115V 50/60Hz	12V	150mA	T40 B	83		•		•
XP301-801	115V 50/60Hz	15V	120mA	T40 B	83		•		•
XP301-802	115V 50/60Hz	18V	100mA	T40 B	83		•		•
XP301-803	115V 50/60Hz	24V	75mA	T40 B	83		•		•
XP302-804	115V 50/60Hz	2x4.5V	2x200mA	T40 B	83		•		•
XP302-805	115V 50/60Hz	2x6V	2x150mA	T40 B	83		•		•
XP302-806	115V 50/60Hz	2x7.5V	2x120mA	T40 B	83		•		•
XP302-807	115V 50/60Hz	2x9V	2x100mA	T40 B	83		•		•
XP302-808	115V 50/60Hz	2x12V	2x75mA	T40 B	83		•		•
XP302-809	115V 50/60Hz	2x15V	2x60mA	T40 B	83		•		•
XP302-810	115V 50/60Hz	2x18V	2x50mA	T40 B	83		•		•
XP302-811	115V 50/60Hz	2x24V	2x38mA	T40 B	83		•		•
XP301-596	230V 50/60Hz	4.5V	400mA	T40 B	83		•	•	•
XP301-597	230V 50/60Hz	6V	300mA	T40 B	83		•	•	•
XP301-598	230V 50/60Hz	7.5V	240mA	T40 B	83		•	•	•
XP301-599	230V 50/60Hz	9V	200mA	T40 B	83		•	•	•
XP301-700	230V 50/60Hz	12V	150mA	T40 B	83		•	•	•
XP301-701	230V 50/60Hz	15V	120mA	T40 B	83		•	•	•
XP301-702	230V 50/60Hz	18V	100mA	T40 B	83		•	•	•
XP301-703	230V 50/60Hz	24V	75mA	T40 B	83		•	•	•
XP302-704	230V 50/60Hz	2x4.5V	2x200mA	T40 B	83		•	•	•
XP302-705	230V 50/60Hz	2x6V	2x150mA	T40 B	83		•	•	•
XP302-706	230V 50/60Hz	2x7.5V	2x120mA	T40 B	83		•	•	•
XP302-707	230V 50/60Hz	2x9V	2x100mA	T40 B	83		•	•	•
XP302-708	230V 50/60Hz	2x12V	2x75mA	T40 B	83		•	•	•
XP302-709	230V 50/60Hz	2x15V	2x60mA	T40 B	83		•	•	•
XP302-710	230V 50/60Hz	2x18V	2x50mA	T40 B	83		•	•	•
XP302-711	230V 50/60Hz	2x24V	2x38mA	T40 B	83		•	•	•