


EI38-13.6 3.5VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000, GB19212-1, GB19212-7
- 100% Production Tested

OUTLINE DIMENSIONS

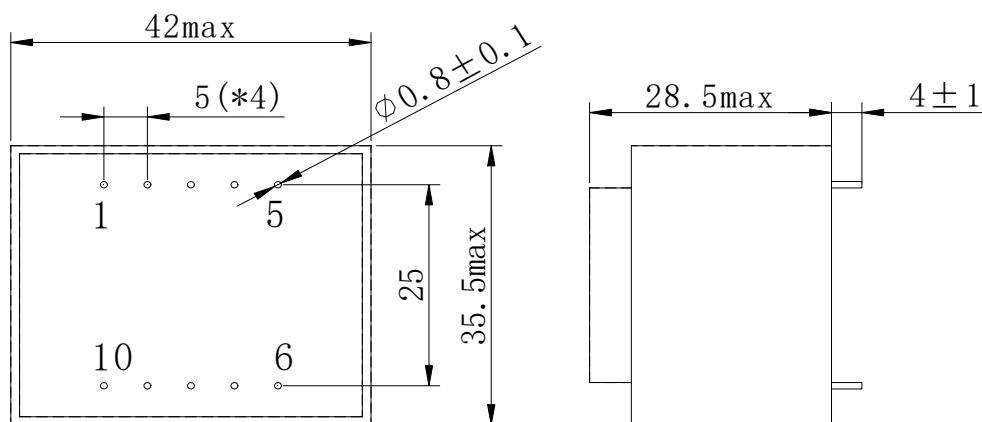


COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and

Telecommunications

SCHEMATIC DIAGRAM

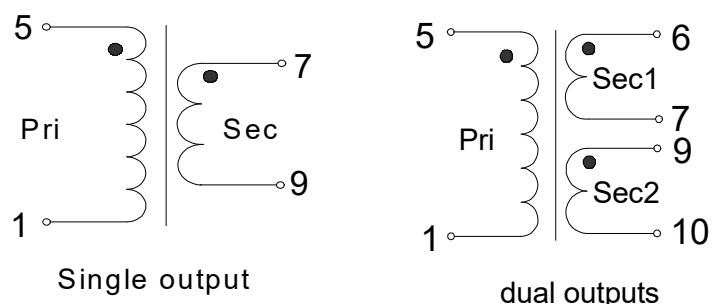

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP381-800	115V 50/60Hz	4.5V	777mA	T70 B	154		•		•
XP381-801	115V 50/60Hz	6V	583mA	T70 B	154		•		•
XP381-802	115V 50/60Hz	7.5V	466mA	T70 B	154		•		•
XP381-803	115V 50/60Hz	9V	388mA	T70 B	154		•		•
XP381-804	115V 50/60Hz	12V	291mA	T70 B	154		•		•
XP381-805	115V 50/60Hz	15V	233mA	T70 B	154		•		•
XP381-806	115V 50/60Hz	18V	194mA	T70 B	154		•		•
XP381-807	115V 50/60Hz	24V	145mA	T70 B	154		•		•
XP382-808	115V 50/60Hz	2x4.5V	2x388mA	T70 B	154		•		•
XP382-809	115V 50/60Hz	2x6V	2x291mA	T70 B	154		•		•
XP382-810	115V 50/60Hz	2x7.5V	2x233mA	T70 B	154		•		•
XP382-811	115V 50/60Hz	2x9V	2x194mA	T70 B	154		•		•
XP382-812	115V 50/60Hz	2x12V	2x145mA	T70 B	154		•		•
XP382-813	115V 50/60Hz	2x15V	2x116mA	T70 B	154		•		•
XP382-814	115V 50/60Hz	2x18V	2x97mA	T70 B	154		•		•
XP382-815	115V 50/60Hz	2x24V	2x72mA	T70 B	154		•		•
XP381-900	230V 50/60Hz	4.5V	777mA	T70 B	154		•	•	•
XP381-901	230V 50/60Hz	6V	583mA	T70 B	154		•	•	•
XP381-902	230V 50/60Hz	7.5V	466mA	T70 B	154		•	•	•
XP381-903	230V 50/60Hz	9V	388mA	T70 B	154		•	•	•
XP381-904	230V 50/60Hz	12V	291mA	T70 B	154		•	•	•
XP381-905	230V 50/60Hz	15V	233mA	T70 B	154		•	•	•
XP381-906	230V 50/60Hz	18V	194mA	T70 B	154		•	•	•
XP381-907	230V 50/60Hz	24V	145mA	T70 B	154		•	•	•
XP382-908	230V 50/60Hz	2x4.5V	2x388mA	T70 B	154		•	•	•
XP382-909	230V 50/60Hz	2x6V	2x291mA	T70 B	154		•	•	•
XP382-910	230V 50/60Hz	2x7.5V	2x233mA	T70 B	154		•	•	•
XP382-911	230V 50/60Hz	2x9V	2x194mA	T70 B	154		•	•	•
XP382-912	230V 50/60Hz	2x12V	2x145mA	T70 B	154		•	•	•
XP382-913	230V 50/60Hz	2x15V	2x116mA	T70 B	154		•	•	•
XP382-914	230V 50/60Hz	2x18V	2x97mA	T70 B	154		•	•	•
XP382-915	230V 50/60Hz	2x24V	2x72mA	T70 B	154		•	•	•