


EI38-13.6 4.5VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


OUTLINE DIMENSIONS

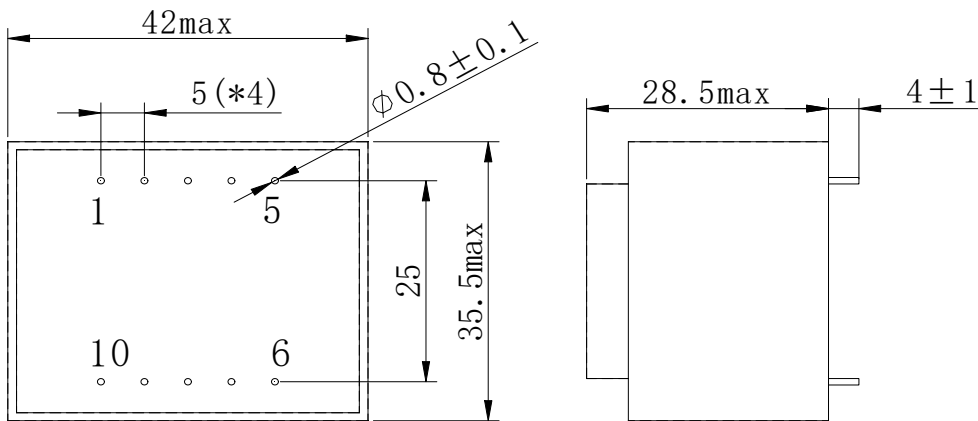


COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

SCHEMATIC DIAGRAM



Single output



dual outputs

ELECTRONIC SPECIFICATIONS:

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP381-816	115V 50/60Hz	4.5V	1000mA	T40 B	154		•		•
XP381-817	115V 50/60Hz	6V	750mA	T40 B	154		•		•
XP381-818	115V 50/60Hz	7.5V	600mA	T40 B	154		•		•
XP381-819	115V 50/60Hz	9V	500mA	T40 B	154		•		•
XP381-820	115V 50/60Hz	12V	375mA	T40 B	154		•		•
XP381-821	115V 50/60Hz	15V	300mA	T40 B	154		•		•
XP381-822	115V 50/60Hz	18V	250mA	T40 B	154		•		•
XP381-823	115V 50/60Hz	24V	187mA	T40 B	154		•		•
XP382-824	115V 50/60Hz	2x4.5V	2x500mA	T40 B	154		•		•
XP382-825	115V 50/60Hz	2x6V	2x375mA	T40 B	154		•		•
XP382-826	115V 50/60Hz	2x7.5V	2x300mA	T40 B	154		•		•
XP382-827	115V 50/60Hz	2x9V	2x250mA	T40 B	154		•		•
XP382-828	115V 50/60Hz	2x12V	2x187mA	T40 B	154		•		•
XP382-829	115V 50/60Hz	2x15V	2x150mA	T40 B	154		•		•
XP382-830	115V 50/60Hz	2x18V	2x125mA	T40 B	154		•		•
XP382-831	115V 50/60Hz	2x24V	2x93mA	T40 B	154		•		•
XP381-916	230V 50/60Hz	4.5V	1000mA	T40 B	154		•	•	•
XP381-917	230V 50/60Hz	6V	750mA	T40 B	154		•	•	•
XP381-918	230V 50/60Hz	7.5V	600mA	T40 B	154		•	•	•
XP381-919	230V 50/60Hz	9V	500mA	T40 B	154		•	•	•
XP381-920	230V 50/60Hz	12V	375mA	T40 B	154		•	•	•
XP381-921	230V 50/60Hz	15V	300mA	T40 B	154		•	•	•
XP381-922	230V 50/60Hz	18V	250mA	T40 B	154		•	•	•
XP381-923	230V 50/60Hz	24V	187mA	T40 B	154		•	•	•
XP382-924	230V 50/60Hz	2x4.5V	2x500mA	T40 B	154		•	•	•
XP382-925	230V 50/60Hz	2x6V	2x375mA	T40 B	154		•	•	•
XP382-926	230V 50/60Hz	2x7.5V	2x300mA	T40 B	154		•	•	•
XP382-927	230V 50/60Hz	2x9V	2x250mA	T40 B	154		•	•	•
XP382-928	230V 50/60Hz	2x12V	2x187mA	T40 B	154		•	•	•
XP382-929	230V 50/60Hz	2x15V	2x150mA	T40 B	154		•	•	•
XP382-930	230V 50/60Hz	2x18V	2x125mA	T40 B	154		•	•	•
XP382-931	230V 50/60Hz	2x24V	2x93mA	T40 B	154		•	•	•