


EI42-14.8 5.0VA Encapsulated Transformer

FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000, GB19212-1, GB19212-7
- 100% Production Tested


OUTLINE DIMENSIONS

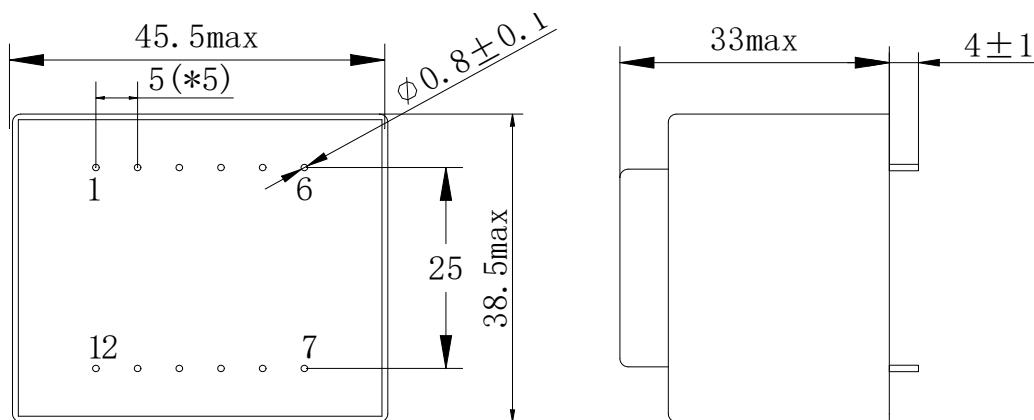

COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and
- Telecommunications

SCHEMATIC DIAGRAM

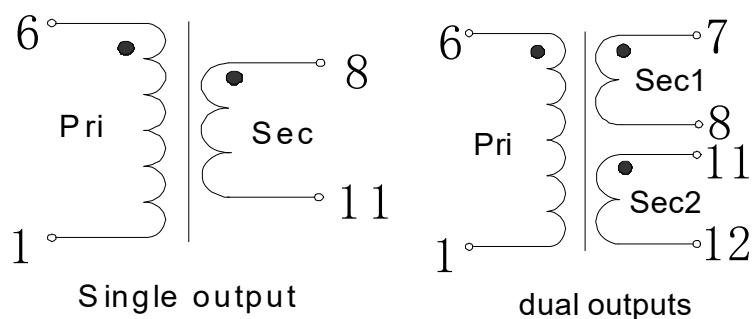

ELECTRONIC SPECIFICATIONS:

| PART NO | Primary [V] | Secondary [V] | Current [mA] | Ambient TEMP.(°C) | Weight (g) | Certificate | | | |
|-----------|--------------|---------------|--------------|-------------------|------------|-------------|----|-----|----|
| | | | | | | VDE | UL | CQC | CE |
| XP421-800 | 115V 50/60Hz | 4.5V | 1111mA | T70 B | 200 | • | • | | • |
| XP421-801 | 115V 50/60Hz | 6V | 833mA | T70 B | 200 | • | | | • |
| XP421-802 | 115V 50/60Hz | 7.5V | 666mA | T70 B | 200 | • | | | • |
| XP421-803 | 115V 50/60Hz | 9V | 555mA | T70 B | 200 | • | | | • |
| XP421-804 | 115V 50/60Hz | 12V | 416mA | T70 B | 200 | • | | | • |
| XP421-805 | 115V 50/60Hz | 15V | 333mA | T70 B | 200 | • | | | • |
| XP421-806 | 115V 50/60Hz | 18V | 277mA | T70 B | 200 | • | | | • |
| XP421-807 | 115V 50/60Hz | 24V | 208mA | T70 B | 200 | • | | | • |
| XP422-808 | 115V 50/60Hz | 2x4.5V | 2x555mA | T70 B | 200 | • | | | • |
| XP422-809 | 115V 50/60Hz | 2x6V | 2x416mA | T70 B | 200 | • | | | • |
| XP422-810 | 115V 50/60Hz | 2x7.5V | 2x333mA | T70 B | 200 | • | | | • |
| XP422-811 | 115V 50/60Hz | 2x9V | 2x277mA | T70 B | 200 | • | | | • |
| XP422-812 | 115V 50/60Hz | 2x12V | 2x208mA | T70 B | 200 | • | | | • |
| XP422-813 | 115V 50/60Hz | 2x15V | 2x166mA | T70 B | 200 | • | | | • |
| XP422-814 | 115V 50/60Hz | 2x18V | 2x138mA | T70 B | 200 | • | | | • |
| XP422-815 | 115V 50/60Hz | 2x24V | 2x104mA | T70 B | 200 | • | | | • |
| XP421-900 | 230V 50/60Hz | 4.5V | 1111mA | T70 B | 200 | • | • | • | • |
| XP421-901 | 230V 50/60Hz | 6V | 833mA | T70 B | 200 | • | • | • | • |
| XP421-902 | 230V 50/60Hz | 7.5V | 666mA | T70 B | 200 | • | • | • | • |
| XP421-903 | 230V 50/60Hz | 9V | 555mA | T70 B | 200 | • | • | • | • |
| XP421-904 | 230V 50/60Hz | 12V | 416mA | T70 B | 200 | • | • | • | • |
| XP421-905 | 230V 50/60Hz | 15V | 333mA | T70 B | 200 | • | • | • | • |
| XP421-906 | 230V 50/60Hz | 18V | 277mA | T70 B | 200 | • | • | • | • |
| XP421-907 | 230V 50/60Hz | 24V | 208mA | T70 B | 200 | • | • | • | • |
| XP422-908 | 230V 50/60Hz | 2x4.5V | 2x555mA | T70 B | 200 | • | • | • | • |
| XP422-909 | 230V 50/60Hz | 2x6V | 2x416mA | T70 B | 200 | • | • | • | • |
| XP422-910 | 230V 50/60Hz | 2x7.5V | 2x333mA | T70 B | 200 | • | • | • | • |
| XP422-911 | 230V 50/60Hz | 2x9V | 2x277mA | T70 B | 200 | • | • | • | • |
| XP422-912 | 230V 50/60Hz | 2x12V | 2x208mA | T70 B | 200 | • | • | • | • |
| XP422-913 | 230V 50/60Hz | 2x15V | 2x166mA | T70 B | 200 | • | • | • | • |
| XP422-914 | 230V 50/60Hz | 2x18V | 2x138mA | T70 B | 200 | • | • | • | • |
| XP422-915 | 230V 50/60Hz | 2x24V | 2x104mA | T70 B | 200 | • | • | • | • |