


## EI48-16.8 8.0VA Encapsulated Transformer

### FEATURES

- CQC file No.: CQC17001167224
- CE file No: BSTXD190311209301EC/BSTXD190311209301SC
- Vacuum Filling, Encapsulated Design Prevent dust and humidity
- High efficiency, Low Temperature Rise
- Dielectric Strength 4000VAC
- Class B (130° C) insulation material.
- Operating temperature from -40° C to 70° C
- Design according to EN61558-1, EN61000,GB19212-1, GB19212-7
- 100% Production Tested


### OUTLINE DIMENSIONS

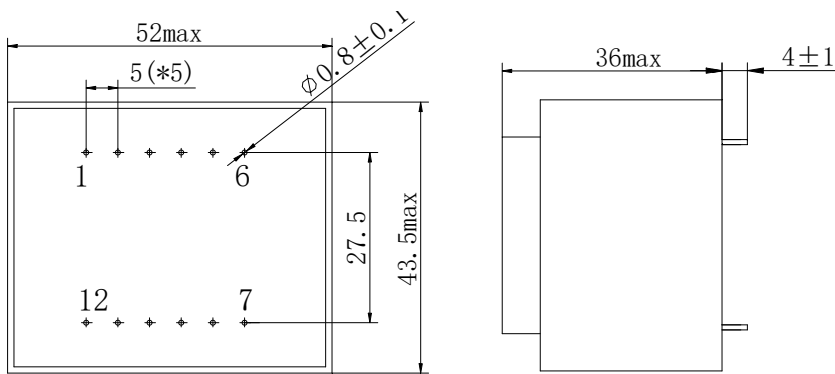

### COMMON APPLICATIONS

- Medical equipment
- Industrial equipment
- Industrial control
- Test equipment
- Industrial computer
- Avionics and Telecommunications

### SCHEMATIC DIAGRAM

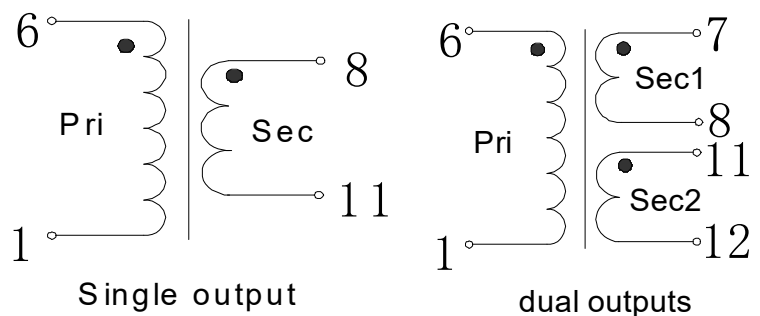

PART NO	Primary [V]	Secondary [V]	Current [mA]	Ambient TEMP.(°C)	Weight (g)	Certificate			
						VDE	UL	CQC	CE
XP481-800	115V 50/60Hz	4.5V	1777mA	T70 B	300		•		•
XP481-801	115V 50/60Hz	6V	1333mA	T70 B	300		•		•
XP481-802	115V 50/60Hz	7.5V	1066mA	T70 B	300		•		•
XP481-803	115V 50/60Hz	9V	888mA	T70 B	300		•		•
XP481-804	115V 50/60Hz	12V	666mA	T70 B	300		•		•
XP481-805	115V 50/60Hz	15V	533mA	T70 B	300		•		•
XP481-806	115V 50/60Hz	18V	444mA	T70 B	300		•		•
XP481-807	115V 50/60Hz	24V	333mA	T70 B	300		•		•
XP482-808	115V 50/60Hz	2x4.5V	2x888mA	T70 B	300		•		•
XP482-809	115V 50/60Hz	2x6V	2x666mA	T70 B	300		•		•
XP482-810	115V 50/60Hz	2x7.5V	2x533mA	T70 B	300		•		•
XP482-811	115V 50/60Hz	2x9V	2x444mA	T70 B	300		•		•
XP482-812	115V 50/60Hz	2x12V	2x333mA	T70 B	300		•		•
XP482-813	115V 50/60Hz	2x15V	2x266mA	T70 B	300		•		•
XP482-814	115V 50/60Hz	2x18V	2x222mA	T70 B	300		•		•
XP482-815	115V 50/60Hz	2x24V	2x166mA	T70 B	300		•		•
XP481-900	230V 50/60Hz	4.5V	1777mA	T70 B	300		•	•	•
XP481-901	230V 50/60Hz	6V	1333mA	T70 B	300		•	•	•
XP481-902	230V 50/60Hz	7.5V	1066mA	T70 B	300		•	•	•
XP481-903	230V 50/60Hz	9V	888mA	T70 B	300		•	•	•
XP481-904	230V 50/60Hz	12V	666mA	T70 B	300		•	•	•
XP481-905	230V 50/60Hz	15V	533mA	T70 B	300		•	•	•
XP481-906	230V 50/60Hz	18V	444mA	T70 B	300		•	•	•
XP481-907	230V 50/60Hz	24V	333mA	T70 B	300		•	•	•
XP482-908	230V 50/60Hz	2x4.5V	2x888mA	T70 B	300		•	•	•
XP482-909	230V 50/60Hz	2x6V	2x666mA	T70 B	300		•	•	•
XP482-910	230V 50/60Hz	2x7.5V	2x533mA	T70 B	300		•	•	•
XP482-911	230V 50/60Hz	2x9V	2x444mA	T70 B	300		•	•	•
XP482-912	230V 50/60Hz	2x12V	2x333mA	T70 B	300		•	•	•
XP482-913	230V 50/60Hz	2x15V	2x266mA	T70 B	300		•	•	•
XP482-914	230V 50/60Hz	2x18V	2x222mA	T70 B	300		•	•	•
XP482-915	230V 50/60Hz	2x24V	2x166mA	T70 B	300		•	•	•